


WSB-H610-R11

Full-size PICMG 1.0 CPU card supports 32nm LGA 1155 Intel® Core™ i7/i5/i3, Pentium® or Celeron® CPU with Intel® H61, DDR3, VGA, dual Realtek PCIe GbE, USB 2.0, SATA 3Gb/s, COM, HD Audio and RoHS

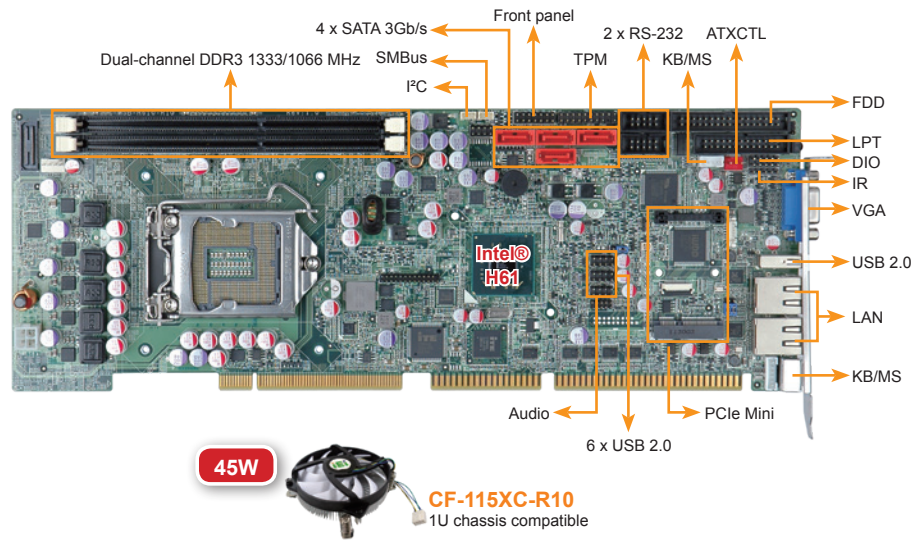

Specifications

- ◆ CPU
LGA 1155 socket supports Intel® Core™ i7/i5/i3, Pentium® or Celeron® processor
- ◆ Chipset
Intel® H61
- ◆ Memory
Two 240-pin 1333/1066 MHz dual-channel DDR3 & DDR3L SDRAM unbuffered DIMMs support up to 16 GB
- ◆ BIOS
UEFI
- ◆ Graphics Engine
Intel® HD Graphics Gen 6 supports DX10.1 and OpenGL 3.0
Full MPEG2, VC1, AVC Decode
- ◆ Display Output
1 x VGA (up to 2048x1536@75Hz)
- ◆ Ethernet
LAN1: Realtek RTL8111E PCIe GbE controller with ASF 2.0 support
LAN2: Realtek RTL8111E PCIe GbE controller
- ◆ External I/O Interface
1 x KB/MS 1 x USB 2.0
- ◆ Internal I/O Interface
1 x FDD (2x17 pin) 1 x KB/MS (1x6 pin)
1 x LPT (2x13 pin) 1 x RS-422/485 (1x4 pin, P=2.0)
2 x RS-232 (2x5pin, P=2.54) 4 x SATA 3Gb/s (no AHCI & RAID support)
6 x USB 2.0 (2x4 pin, P=2.54)
- ◆ Audio
Supports 7.1-channel HD Audio by IEI AC-KIT-892HD-R10 kit
- ◆ Front Panel
1 x Front panel (2x7 pin, power LED, HDD LED, speaker, power button, reset button)
- ◆ TPM
1 x TPM (2x10 pin)
- ◆ SMBus
1 x SMBus (1x4 pin)
- ◆ I²C
1 x I²C (1x4 pin)
- ◆ Expansion
PCI signal and ISA signal via golden finger
- ◆ Watchdog Timer
Software programmable supports 1~255 sec. system reset
- ◆ Digital I/O
8-bit digital I/O (2x5 pin)
- ◆ Fan Connector
1 x CPU smart fan (1x4 pin)
1 x System smart fan (1x4 pin)
- ◆ Power Supply
5V/12V, AT/ATX support
- ◆ Power Consumption
5V@4.53A, 12V@0.19A, Vcore_12V@7.81A, 5VSB@0.18A
(3.4GHz Intel® Core™ i7-2600K with two 2 GB 1333 MHz DDR3 memory)
- ◆ Operating Temperature
-10°C ~ 60°C
- ◆ Storage Temperature
-20°C ~ 70°C
- ◆ Operating Humidity
5% ~ 95%, non-condensing
- ◆ Dimensions
338 mm x 122 mm
- ◆ Weight
GW: 1000g / NW: 260g
- ◆ CE/FCC compliant

Features

- Full-size PICMG 1.0 CPU card with LGA 1155 Intel® Core™ i7/i5/i3, Pentium® or Celeron® processor supported
- Two DDR3 & DDR3L 1333/1066 MHz DIMM SDRAM support up to 16 GB
- Embedded controller on board supports infrared and PECI 2.0 technologies
- Dual Realtek PCIe GbE and LAN1 with ASF 2.0 support
- TPM V1.2 hardware security function supported by TPM module
- IEI One Key Recovery solution allows you to create raidp OS backup and recovery

Packing List

1 x WSB-H610 single board computer
1 x Dual RS-232 cable with bracket
1 x KB/MS Y cable
1 x USB cable
2 x SATA cable
1 x Mini jumper pack
1 x QIG

Ordering Information

Part No.	Description
WSB-H610-R11	Full-size PICMG 1.0 CPU card supports 32nm LGA 1155 Intel® Core™ i7/i5/i3, Pentium® or Celeron® CPU with Intel® H61, DDR3, VGA, dual Realtek PCIe GbE, USB 2.0, SATA 3Gb/s, COM, HD Audio and RoHS
19800-000049-RS	LPT flat cable, 240mm, P=2.54
19800-000075-RS	PS/2 KB/MS cable with bracket, 220mm, P=2.0
32006-000300-100-RS	PS/2 KB/MS Y-cable without bracket, 140mm/120mm
32102-000100-200-RS	SATA power cable, MOLEX 5264-4P to SATA15P
32200-000017-RS	FDD cable, 520mm, P=2.54
AC-KIT-892HD-R10	7.1-channel HD Audio kit with Realtek ALC892 supports dual audio streams
CF-115XA-R10	High performance LGA 1155/LGA 1156 cooler kit, 1U chassis compatible, 73W
CF-115XC-R10	LGA 1155/LGA 1156 cooler kit, 1U chassis compatible, 45W
CF-115XD-R10	LGA 1155/LGA 1156 cooler kit, 1U chassis compatible, 65W
CF-115XE-R10	High performance LGA 1155/LGA 1156 cooler kit, 95W
SAIDE-KIT01-R10	SATA to IDE/CF converter board
TPM-IN01-R20	20-pin Infineon TPM module, software management tool, firmware v3.17