


EB-650-Q370

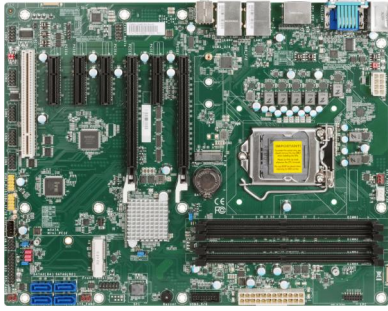

产品特性

- ◆ 2*PCIe x16, 3*PCIe x4, 1*PCIe x1, 1*PCI
- ◆ Intel® Q370芯片组
- ◆ 支持四通道 DDR4 DIMM 至 128GB
- ◆ 1*VGA, 2*DP++
- ◆ 2*Intel网口, 12*USB, 6*串口

产品规格

处理器	8/9th Generation Intel® Core™/Pentium®/Celeron® Processors, LGA 1151 socket		扩展槽	2*PCIe x16 (Gen3) (1*16 signal or 2*8 signals), 3*PCIe x4(Gen 3) 1*PCIe*1(Gen 3) 1*PCI 1*Full-sized Mini PCIe (PCIe/SATA/USB2.0),share with SATA(R5) 1*M.2 2242/2260/2280 M key (PCIe Gen3*4 NVMe/SATA)	
系统芯片组	Intel® Q370 Chipset				
系统内存	4*288-pin DIMM up to 128GB, Dual Channel DDR4 2400/2666MHz				
BIOS	AMI SPI 128Mbit				
以太网网络	1*Intel® I211AT PCIe (10/100/1000Mbps) 1*Intel® I219LM PCIe with iAMT12.0 (10/100/1000Mbps)(only Corei7/i5 supports iAMT)				
背部I/O接口	以太网网络	2*GbE (RJ-45)	显示	1*VGA: resolution up to 1920x1200 @ 60Hz 2*DP++: resolution up to 4096x2160 @ 60Hz	
	串口	1*RS-232/422/485 (RS-232 w/power)(DB-9)			
	USB	2*USB 3.1 Gen 2, 2*USB 3.1 Gen 1, 2*USB 2.0			
	PS/2	1*PS/2			
	显示	2*DP++, 1*VGA			
内部I/O接口	音源	1*Line-out, 1*Mic-in, 1*Line-in(opt., MOQ required)	音频	Realtek ALC888	
	串行端口	1*RS-232/422/485 (RS-232 w/power)(2.54mm pitch), 4*RS-232(2.54mm pitch)	温度	工作温度: -5 to 65°C, 存储温度: -30 to 60°C with RTC Battery; -40-85°C without RTC Battery	
		USB			2*USB 3.1 Gen 1(2.00mm pitch), 4*USB 2.0(2.54mm pitch) (1*USB 2.0 colay vertical Type A)(opt., MOQ required)
		音效			1*Front Audio Header, 1*S/PDIF
		SATA			4*SATA 3.0 (up to 6Gb/s, SATA3(R5shared with miniPCIe(SATA), default at mini PCI) RAID 0/1/5/10
DIO	1*8-bit DIO	湿度	工作湿度: 5 to 95% RH, 存储湿度: 5 to 95% RH		
			尺寸	305mm (12")*244mm (9.6")	

订货信息

型号	说明
EB-650-Q370-XX	ATX Motherboard supports LGA 1151 Intel® Core™/Pentium®/Celeron LGA 1151, Intel® Q370