


EB-630-H110

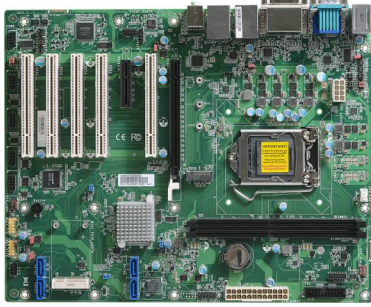

产品特性

- ◆ 5*PCI, 1*PClex16, 1*PClex4
- ◆ Intel® H110芯片组
- ◆ 支持双通道DDR4 UDIMM 至 32GB
- ◆ 1*VGA ,1*DVI-I (DVI-D signal) ,1*HDMI
- ◆ 2*Intel网口, 10*USB, 6*串口

产品规格

处理器	6/7th Generation Intel® Core™ /Pentium®/Celeron® LGA 1151 Socket Processors with TDP up to 95W		扩展槽	1*PCIe x16 (Gen 3),1*PCIe x4 (Gen 2),5*PCI 1*M.2 2242/2260/2280 M key (PCIe Gen3 x 4 NVMe, share with PCIe x4 slot) 1*mSATA (Share with SATA connector)
系统芯片组	Intel® H110 Chipset			
系统内存	2*288-pin UDIMM up to 32GB Dual Channel DDR4 up to 2666MHz Core™ i5/i7 only support non-ECC			
BIOS	Insyde SPI 128Mbit		显示	1*VGA VGA: resolution up to 1920x1200 @ 60Hz 1*DVI-I (DVI-D signal) DVI-I: resolution up to 1920x1200 @ 60Hz 1*HDMI1.4b HDMI1.4b: resolution up to 4096x2160 @ 24Hz
以太网	1*Intel®I219V PCIe (10/100/1000Mbps) 1*Intel®I211AT PCIe (10/100/1000Mbps)			
背部I/O接口	以太网	2*GbE (RJ-45)		
	串口	1*RS-232/422/ 485 (RS-232 w/power) (DB-9)		
	USB	4*USB 3.1 gen1,2*USB 2.0		
	PS/2	1*PS/2		
	显示	1*VGA,1*DVI-I (DVI-D signal), 1*HDMI		
内部I/O接口	音源	1*Line-out,1*Mic-in, 1*Line-in (opt., MOQ required)	音频	Realtek ALC888S-VD2-GR
	串行端口	1*RS-232/422/485 (RS-232w/power) (2.54mm pitch)	温度	工作温度: -5 to 65°C, 存储温度: -30 to 60°C with RTC Battery; -40 to 85°C without RTC Battery
		4*RS-232 (2.54mm pitch)		
	USB	4*USB 2.0 (2.54mm pitch) or up to 2*Vertical USB 2.0 (type A) (opt., MOQ required)	湿度	工作湿度: 5 to 90% RH, 存储湿度: 5 to 90% RH
		音效		
SATA		4*SATA 3.0 (up to 6Gb/s)		
DIO	1*8-bit DIO	尺寸	305mm (12")*244mm (9.6")	

订货信息

型号	说明
EB-630-H110-XX	ATX Motherboard supports LGA 1151 Intel® Core™ i7/i5/i3/Pentium, Intel® H110