


EB-631-H420

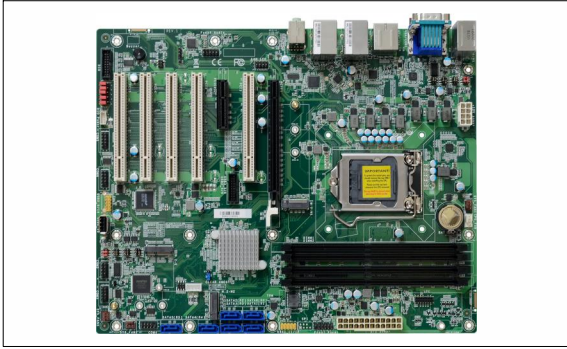

产品特性

- ◆ 1*PCIe x16, 1*PCIe x4,5*PCI
- ◆ Intel® H420E芯片组
- ◆ 支持双通道 288-pin Non-ECC至 64GB
- ◆ VGA + DP++ / VGA + HDMI / DP++ + HDMI
- ◆ 2*Intel网口,10*USB,6*串口

产品规格

处理器	10th Generation Intel® LGA 1200 socket Processors, TDP support up to 125W		扩展槽	1*PCIe x16 (Gen3), 1*PCIe x4(Gen 3), 5*PCI 1*M.2 M Key(PCIe*4 NVMe share with PCIe*4 slot,opt.,MOQ required)
系统芯片组	Intel® H420E Chipset			
系统内存	2*288-pin Non-ECC UDIMM up to 64GB, Dual Channel DDR4 2400/2666/2933MHz			
BIOS	Insyde SPI 256Mbit		显示	VGA+DP++/ VGA+HDMI/ DP+++HDMI(Dual Display) VGA:resolution up to 1920x1200 @ 60Hz DP++:resolution up to 4096x2160 @ 60Hz HDMI:resolution up to 4096x2160 @ 24Hz
以太网网络	1*Intel® I211AT PCIe (10/100/1000Mbps), 1*Intel® I219LM/I219V (10/100/1000Mbps)			
背部I/O接口	以太网网络	2*GbE (RJ-45)		
	串口	1*RS-232/422/485 (RS-232 w/power)(DB-9)		
	USB	4*USB 3.2Gen1,2*USB 2.0		
	显示	1*DP++, 1*VGA, 1*HDMI		
音频	1*Line-out,1*Mic-in, 1*Line-in(opt.,MOQ required)		音频	Realtek ALC888
内部I/O接口	串行端口	1*RS-232/422/485 (RS-232 w/power) (2.54mm pitch), 4*RS-232(2.54mm pitch)	温度	工作温度: -5 to 65°C, 存储温度: -40 to 85°C
	USB	2*USB 3.2Gen 1,2*USB 2.0 (2.54mm pitch,colay vertical Type A,opt:MOQ required)	湿度	工作湿度: 5 to 90% RH, 存储湿度: 5 to 90% RH
	音效	1*Front Audio Header,1*S/PDIF		
	SATA	4*SATA 3.0 (up to 6Gb/s)	尺寸	305mm (12")*244mm (9.6")
	DIO	1*16-bit DIO		
	PS/2	1*PS/2(mini-DIN-6)		

订货信息

型号	说明
EB-631-H420-XX	ATX Motherboard supports LGA 1200 Intel® Core™/Pentium/Celeron, Intel® H420E Chipset